


**ΦΛΑΝΤΖΕΣ ΜΕ ΣΠΕΙΡΩΜΑ DIN 2566 PN10-16**

**SCREWED PIPE FLANGES**

Nominal Pressure :10 and 16kgf/cm<sup>2</sup>-ND10-ND16

(TS ISO 7005-1)

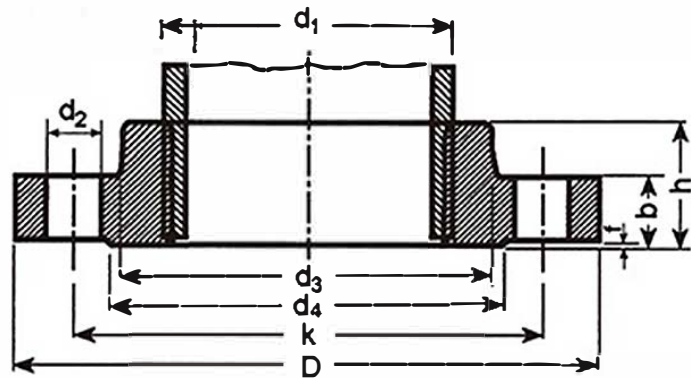

BORU (Pipe)		FLANS (Flange)					BOYUN (Neck)	ΑΥΧΗΛΩΝΤΗΣΙ (Raised face)			CIVATALAR (Bolts)			FLANSAGIRLIGI (Flange weight) (7.85 kg/dm <sup>3</sup> ) kg
DN	d <sub>1</sub>	Boru Vidasi (Whitworth)	D	b	k	h	d <sub>5</sub>	d <sub>4</sub>	f	Sayisi Each	Vida Screw	d <sub>2</sub>		
15	21.3	R1/2"	95	14	65	20	35	45	2	4	M12	14	0.613	
20	26.9	R3/4"	105	16	75	24	45	58	2	4	M12	14	0.910	
25	33.7	R1"	115	16	85	24	52	68	2	4	M12	14	1.10	
32	42.4	R1 1/4"	140	16	100	26	60	78	2	4	M16	18	1.60	
40	48.3	R1 1/2"	150	16	110	26	70	88	3	4	M16	18	1.78	
50	60.3	R2"	165	18	125	28	85	102	3	4	M16	18	2.43	
65	76.1	R2 1/2"	185	18	145	32	105	122	3	4	M16	18	3.18	
80	88.9	R3"	200	20	160	34	118	138	3	4/8	M16	18	4.12	
100	114.3	R4"	220	20	180	38	140	158	3	8	M16	18	4.47	
125	139.7	R5"	250	22	210	40	168	188	3	8	M16	18	6.13	
150	168.7	R6"	285	22	240	44	196	212	3	8	M20	22	7.92	